Aluminum Corrosion Processes in Microbial Cultures

Gordon C. Blanchard


and

Charles R. Goucher

Paper presented at the Electrochemical Society Meeting Buffalo, New York, October 10-11, 1965.

MELPAR, INC. 7700 Arlington Boulevard Falls Church, Virginia

20050303274



9821 8 GEP

The corrosion of metals by microorganisms has been extensively studied since 1934, when von Wolzogen Kuhr and van der Vlugt (1) postulated that the anaerobic sulfate-reducing bacterium, <u>Desulfovibrio desulfuricans</u>, corrodes iron; its metabolism consumes hydrogen produced at cathodic sites for reducing sulfate to sulfide. The role of hydrogenase activity and sulfide production in the corrosion process has subsequently been studied with these organisms (2-7) as well as with other anaerobic bacteria, i.e., Clostridium nigrificans (3,4).

D. desulfuricans has been isolated occasionally from aircraft wing tanks (8) and fuel separators (9) and has been reported by Hedrick et al (10) and Iverson (11) to cause pitting corrosion of aluminum alloys. Hedricks experiments show that aluminum alloy corrosion by D. desulfuricans is more extensive under aerated than static conditions. Corrosion under these conditions was probably not associated with growth (12). Iverson grew D. desulfuricans in stationary tanks in the presence of a mixed culture of fuel isolates. Under stationary conditions the medium was probably anaerobic because the actively growing aerobes in the mixed culture would evolve CO₂ and produce anaerobic conditions in the bottom of the tanks (13,14).

Both autotrophic and heterotrophic bacteria have been demonstrated to cause corrosion in aerobic systems. The autotrophic microorganisms include the substitute substitute oxidizers, Thiobacillus thiooxidans and T. thioparus (15), and the iron oxidizers Gallionella, Ferrobacillus ferrocxidans, and Thiobacillus ferrocxidans (16,17). Heterotrophic species include representatives of the iron

bacteria genera, Siderocapsa, Spheerotilus, Clonothrix, Leptothrix, and Crenothrix (18). Although these aerobic microorganisms are potentially capable of causing aluminum alloy corrosion they apparently do not utilize hydrocarbons or corrode aircraft wing tanks since they have not been isolated from any fuel system water bottom samples (9,19).

bulk storage tanks and aircraft fuel tanks were bacteria in the genus <u>Pseudomonas</u> and fungi in the genus <u>Hormodendrum</u> (9,19). These and other microorganisms have been associated with the production of operational difficulties in aircraft fuel systems because they grow in this aerobic environment and oxidize the hydrocarbons in jet fuel to sludges, emulsions and corrosive compounds (20-22). The hydrocarbon-oxidizing microorganisms grow in the aqueous phase of fuel-water systems and synthesize organic materials which are incorporated into cellular materials or accumulate in each phase of the medium (hydrocarbon, interphase, or aqueous). Changes in the composition of the aqueous phase during microbial growth is of utmost importance since corrosion is observed in this phase.

The objective of the work reported herein is to describe some of the mechanisms by which fuel-oxidizing pseudomonad cultures corrode aluminum alloys. The role of nitrate and nitrite ions in the inhibition of aluminum alloy corrosion by microorganisms and by inorganic salt solutions is reported.

Experimental Materials and Procedures

The media used in our studies were modifications of Bushnell and Haas (23) (BH medium); the composition is described in Figure 1. Salt solutions were sterilized by autoclaving. Jet fuel was sterilized by Millipore filtration. Reagent grade chemicals were used in all the studies. The JP-4 jet fuels were supplied free of additives by the Air Force POL Retail Distribution Station, Searsport, Maine.

Both mixed and pure cultures were investigated. Mixed inocula, except where indicated, contained pure strains of jet fuel isolates 96 and 101 tentatively identified as Pseudomonas aeruginosa. The inocula for the corrosion experiments were prepared from 48-hour cultures grown on EH medium. Cells were harvested by centrifugation, suspended in distilled water, and washed three times by centrifugation.

All stock cultures and experimental runs were incubated in 100 ml cf medium in 250 ml Erlenmeyer flasks at 28°C on a gyratory shaker (New Brunswick) operating at 100 strokes per minute.

Two types of 1/16 inch aluminum sheet, alloys 7075-T-6 and 2024-T-3 were cut into 4- by 1/4 inch coupons. The coupons were coded at one end with a diamond point, cleaned, and weighed before use. The coupons were cleaned by washing with acetone, wiping with lintless towels, and immersing in 50% HNO3 for 1 minute. The coupons were then rinsed with flowing tap water, rinsed with distilled water, dipped in acetone, blotted dry on a lintless towel, and stored in a desiccator until weighed.

After weighing, one 2024 coupon and one 7075 coupon were bound together at the upper end by two 1/8 inch strips of tygon tubing. Two pieces of applicator sticks were placed between the two alloys and between the two pieces of tygon tubing to prevent the alloys from touching during incubation. The alloys were prevented from rolling during incubation by spreading the alloys apart to the shape of a wishbone at the upper end just below the tygon strips. The coupons were sterilized by dipping first in methanol and then in acetone. After drying in air the coupons were aseptically placed in the EH medium and incubated at 28°C on the gyratory shaker.

Robertson's procedure (24) was used for cleaning the alloy coupons after test; coupons were treated for 10 minutes at 70°C to 80°C in the cleaning solution (20 g K₂Cr₂O₇; 28 ml 85% H₃PO₄, sp. gr. 1.7; and distilled water to 1000 ml) rinsed, dried, and reweighed as described above. Weight loss was calculated. The hydroxyl form of Dowex-1, an anion exchange resin, and the hydrogen form of Dowex-50, a cation exchange resin, were used for determining the ionic characteristics of the corrosion compounds produced by the microorganisms. Sephadex G-25 gel columns were used to separate corrosive compounds on the basis of molecular weight. This gel completely excludes compounds with molecular weights greater than 5000. The excluded compounds occur in the first few fractions.

Dowex-1 and Dowex-50 ion exchange resins and Sephadex gel G-25 were prepared for use by recommended procedures (25,26).

Experimental Results and Discussion

Blanchard and Goucher (27) have reported that the time required for microbes to make a noncorrosive medium corrosive depends on the nature and concentration of ions in the medium; nitrate is an especially effective corrosion inhibitor.

Corrosion in the previous study was determined by visual observation. In the present study the ability of nitrate to inhibit corrosion by young cultures of microorganisms has been confirmed by weight loss measurements. The medium used in this study was more corrosive than the previous medium (27), probably because it contained only one-tenth the phosphate concentration previously used. Mixed cultures of P. aeruginosa (strains 96 and 101) were used. Coupons were incubated for 30 days. The results of this experiment are shown in Figure 1.

The data points in Figure 1 are means of triplicate determinations. The results show that alloy 7075 is more resistant to corrosion by the growth medium and by micro-organisms than is alloy 2024. Nitrate inhibited the corrosion of alloy 2024, but had little or no effect on the corrosion of

^{*}Dowex resins were purchased from Calbiochem, 4921 Cordell Ave., Bethesda, Maryland. Sephadex purchased from Pharmacia Fine Chemicals, Inc., 50 Fifth Ave., New York 17, New York.

alloy 7075. Corrosion of alloy 2024 occurred in the control medium (no microorganisms) at 0, 0.2, and 0.4 mmolar KNO3 but not at 0.6 mmolar KNO3 or above. In the inoculated medium, corrosion of alloy 2024 occurred between 0 and 0.8 mmolar KNO3 but not at 12 mmolar KNO3. The presence of microorganisms in the growth medium caused greater corrosion of both alloys. Nitrate at 12 mmoles/liter inhibited this corrosion. These results agree with the previous corrosion studies where corrosion was assessed by visual examination.

A statistical analysis was performed on the weight loss of alloy 2024 from data obtained between 0 and 0.8 mmolar KNO3. Corrosion of alloy 2024 incubated in inoculated and sterile low nitrate media (KNO3 between 0 and 0.8 mmolar) was evaluated for statistical significance using a standard "t-test" on the means. The test was significant at 0.01; this result implies conservatively that inoculated media corrode more than sterile media 99% of the time.

The data in Figure 1 show that high concentrations of nitrate (12 mmolar KNO₃) protected both alloys from corrosion. This agrees with our previous data (27) and with Uhlig and Gilman (28), who found that NaNO₃ completely inhibited pitting of 18-8 stainless steel in 1% to 15% FeCl₃ solutions. Corrosion in the latter system occurred in a very acidic environment (pH 1.0 to 2.0), whereas corrosion by microcorganisms occurred in a neutral (pH 7.0 to 8.0) environment. Thus, the ability of nitrate to passivate metals appears to be a generalized phenomenon independent of the pH of the

corrosive medium. The mechanism by which the passivity is induced is not known.

Previously, visual observation indicated that microorganisms caused corrosion in the high nitrate medium (12
mmolar KNO₃) after 3-month incubations (27). This experiment
was repeated using weight loss measurements for evaluating
corrosion. The data in Figure 2 show that nitrate concentrations
between 0.2 and 0.8 mmolar protect the alloys from corrosion
in the absence of microorganisms, but fail to protect the alloy
in the presence of microorganisms. The corrosion results
between 0.2 and 0.8 mmolar KNO₃ were analyzed statistically by
the "t-test" on the means. The test was highly significant
at 0.001; this result implies conservatively that, after a
90-day incubation, inoculated media corrode more than
sterile media 99.9% of the time.

At the high nitrate concentration (12 mmolar), however, no differences in weight losses were observed between inoculated and control media. The lack of corrosion by microorganisms in the high nitrate media is in disagreement with our previous data, where microbes caused corrosion in 90 days (27). These differences may be due to the use of two different mixed cultures or to the different methods of assessing corrosion. The present experiments used a mixed culture containing two pseudomonads (strains 96 and 101). The previous experiments used a mixed culture containing

strain 101, Cladosporium resinae, Aspergillus niger, and Desulfovibrio desulfuricans; D. desulfuricans did not grow in the aerobic system and the fungi grew poorly. The present method of measuring corrosion was by weight loss, whereas the previous study assessed corrosion by visual observations of pitting and/or blackening.

Effect of Nitrate and Nitrite on CaCl2 Corrosion of Aluminum Alloys

Previous studies have shown that microorganisms reduce the nitrate concentration of the medium from 12 mmolar to 0.1 mmolar during the first 19 days of incubation; nitrite concentration increased from 0 to 2 mmolar during this time (29). Nitrite has been shown to inhibit stainless steel corrosion by FeCl₃ (30). It was postulated that the lack of corrosion on high nitrate medium (12 mmolar KNO₃) during the 90-day incubation was due either to nitrite inhibition of corrosion or to the production of products which inhibit corrosion.

Nitrate and nitrite were tested as inhibitors of CaCl₂ corrosion. The alloys were immersed in 100-ml mixtures of CaCl₂ and KNO₃, or CaCl₂ and KNO₂ for 4 days at 28°C on a gyratory shaker. The weight losses observed are shown in Figures 3 and 4.

Three different concentrations of CaCl₂ were studied at four different ratios of chloride ion to KNO₃ or chloride ion to KNO₂ -- 0.2, 2.0, 20, and coratios. The data in

Figure 3 show that nitrate causes a variety of responses in a corrosive system. At a high molar ratio (Cl/KNO₃ = 20) nitrate stimulates corrosion, whereas at lower molar ratios (2 and 0.2) nitrate inhibits CaCl₂ corrosion of the alloys. These effects were not observed with KNO₂ (Figure 4). In fact, no inhibition was observed by nitrite even at a molar ratio of 0.2. This indicates that nitrite is not a corrosion inhibitor for these aluminum alloys under the conditions of these tests.

At a Cl/KNO₂ molar ratio of 2, nitrite stimulated corrosion of alloy 7075. This effect was observed initially and the experiment was repeated with 10 coupons in 5 separate flasks. The weight loss observed was 82.2 ± 27 mg/3.8 cm² (means ± maximum deviation). The reason for this stimulation in corrosion is not known. Thus, KNO₂ appears to be an effective inhibitor only against steel corrosion. Although both nitrate and nitrite are good inhibitors of stainless steel corrosion, it is not possible from the data presented herein or from the literature data cited to determine which is the more effective inhibitor.

Components in the Aqueous Phase of 90-Day Cultures

The purpose of this phase was to determine if corrosive fractions exist in the noncorrosive medium (12 mmolar KNO₃) after a 90-day growth of strain 101. Six liters of the aqueous phase produced by strain 101 after the 90-day growth on BH

medium (12 mmolar KNO₃) were fractionated. (See Figure 5.) The concentrated filtrate was fractionated by ion exchange chromatography and by Sephadex chromatography. In the ion exchange fractionations, 75 ml of concentrate were placed on the column and eluted with flowing distilled water. The total eluate collected was about 250 ml.

Three ml of concentrate were placed on the Sephadex column and eluted with water. The volume collected in each of the colored fractions is shown in Table 2. The weight losses observed with the concentrate, Dowex-1 eluate, Dowex-50 eluate, and Sephadex fractions are shown in Table 2.

The objective of these experiments was to separate and characterize the corrosive compounds from the growth media, thus no attempt was made to obtain a weight loss balance in the fractionation. The original 90-day sample used in the fractionation study was noncorrosive. The concentrate caused appreciable corrosion of both alloys; alloy 7075 showed about twice as much weight loss as alloy 2024. Both anionic and cationic compounds are produced by the microorganisms, and both fractions caused aluminum alloy corrosion.

The eluate from the Dowex-1, which contains cations, OH ions, and neutral compounds, caused much more corrosion of alloy 7075 than alloy 2024 -- 61.3 mg compared with 5.7 mg by weight loss. The eluate from the Dowex-50 column, which contains anions, H⁺ ions, and neutral compounds, like the unfractionated concentrate caused about twice as much weight

loss from alloy 7075 as from alloy 2024. Very little weight loss was observed with the distilled water and sterile medium controls, which were processed in the same manner as the inoculated samples. Neutral compounds, if they existed, did

not cause corrosion of either alloy. Very little corrosion

was caused by the Sephadex fractions.

The Sephadex experiment was repeated using the previously described conditions except for the following changes: large column (5 by 65 cm) was used; 300 ml of clear brown filtrate were applied to the column; and 80-ml fractions were collected until it appeared that all materials were removed from the column. The results obtained show that the first seven fractions contained the corrosive components of the medium (Figure 6). No corrosion was observed in any of the fractions containing the pigmented materials. data indicate that old cultures could cause corrosion by producing large molecular weight components (molecular weight 5000 and above) in the medium. The composition of these large molecular weight materials is presently unknown. Experiments are now in progress to determine (1) the composition of these materials, (2) the presence of these materials in young cultures, and (3) whether any of the other fractions (8 through 24) inhibit corrosion.

SUMMARY AND CONCLUSIONS

The growth of microorganisms for 30 days and 90 days in media containing between 0 and 0.8 mmolar KNO₃ as the only nitrogen source for growth caused significantly greater corrosion of alloys 7075 and 2024 than was observed in controls. Microorganisms failed to cause corrosion, even after 90 days in BH medium (12 mmolar KNO₃), although the nitrate concentration after 20 days had decreased to a noninhibitory concentration (0.1 mmolar) for corrosion. All nitrate concentrations inhibited corrosion by the media alone.

Microorganisms reduced some of the nitrate to nitrite during the first 20 days incubation on 12 mmolar KNO₃ media; nitrite increased from 0 at zero time to 2 mmolar after 20 days. However, chemical corrosion tests showed that nitrite was not an effective inhibitor of aluminum alloy corrosion. Nitrite at 10 times the concentration of CaCl₂ caused no inhibition of CaCl₂ corrosion of alloys 7075 and 2024. Nitrate, however, was a very effective inhibitor of CaCl₂ corrosion in this concentration range.

The 90-day high nitrate growth media were found to contain corrosive anionic and cationic components upon fractionation by ion exchange chromatography. These corrosive components were demonstrated by Sephadex chromatography to be large molecules with molecular weights greater than 5000. The lack of corrosion by microorganisms after the 90-day incubation in BH medium (12 mmolar KNO₃) was believed to be due to the formation of corrosion-inhibiting products.

ACKNOWLEDGEHENTS

This research was supported by the Department of the Air Force, Air Force Aero Propulsion Laboratory (AFSC), Wright-Patterson Air Force Base, Ohio.

The government retains the right to reproduce this article in such numbers and forms required for subsequent use by the government.

- 1. C. A. H. von Wolzogen Kuhr and L. S. van der Vlugt, Water, 18, 147 (1934). Translation no. 1021 by W. P. Iverson, U. S. Army Biological Laboratories, Fort Detrick, Maryland.
- 2. G. H. Booth and A. K. Tiller, Trans. Faraday Soc., 56, 1689 (1960).
- 3. A. K. Tiller and G. H. Booth, Part 2, <u>Trans. Faraday Soc.</u>, 58, 110 (1962).
- 4. W. R. Scott, Materials Protection, 4, 57 (1965).
- 5. J. Postgate, <u>Progress in Industrial Microbiology</u>, 2 by D. J. Hockenhull, Interscience Publishers, New York (1960).
- 6. J. Horvath, Acta Chimica Hung., 25, 65 (1960).
- 7. J. Horvath and M. Novak, Acta Chimica Hung., 33, 220 (1962
- 8. H. G. Hedrick, M. T. Carroll, H. P. Owen and D. J. Pritcha Appl. Microbiol., 11, 472 (1964).
- 9. W. B. Engel and F. E. Swatek, <u>Devel. Ind. Microbiol.</u>, 7, 354 (1966).
- 10. H. G. Hedrick, C. E. Miller, J. E. Halkies and J. E. Hilde Appl. Microbiol., 12, 197 (1964).
- 11. W. P. Iverson, this journal, pages to be added in proof.
- 12. J. R. Postgate, Bacteriol. Rev., 29, 425 (1965).
- 13. Marilyn E. George, AMRL Memorandum M-26, Jan. 1963. Wright-Patterson Air Force Base, Dayton, Ohio.
- 14. G. C. Blanchard, unpublished data
- 15. H. D. Peck, Jr., Bacteriol. Rev., 26, 67 (1962).
- 16. P. Dugan and D. G. Lundgren, <u>Develop. Ind. Microbiol.</u>, <u>5</u>, 250 (1964).
- 17. N. J. Lazaroff, <u>J. Bacteriol.</u>, <u>85</u>, 78 (1963).
- 18. E. Olsen and W. Szybalski, Acta Chemica Scand., 3, 1094 (1949).
- 19. W. W. Leathen and Norma A. Kinsel, <u>Develop. Ind. Microbiol</u> 4, 9 (1963).

- 20. S. A. London, V. H. Finefrock, and L. N. Killian, Develop. Ind. Microbiol., 6, 61 (1964).
- 21. S. A. London, AMRL Memorandum M24, 6570th Aerospace Medical Research Laboratories, Wright-Patterson Air Force Base, Ohio (1963).
- 22. A. V. Churchill, Materials Protection, 2, 18 (1963).
- 23. L. D. Bushnell and H. F. Haas, <u>J. Bacteriol.</u>, <u>41</u>, 653 (1941).
- 24. F. A. Champion, Corrosion Testing Procedures, John Wiley and Sons, New York (1965).
- 25. Dowex: Ion Exchange by the Dow Chemical Company, Midland, Michigan (1958).
- 26. J. Porath and E. B. Lindner, Nature, 191, 69 (1961).
- 27. G. C. Blanchard and C. R. Goucher, <u>Develop. Ind. Microbiol.</u>, 6, 95 (1964).
- 28. H. H. Uhlig and J. R. Gilman, Corrosion, 20, 289t (1964).
- 29. G. C. Blanchard and C. R. Goucher, <u>Develop. Ind. Microbiol.</u>, 7, 342 (1966).
- 30. R. A. Legault and M. S. Walker, Corrosion, 20, 232t (1964).

TABLE 1

EFFECT OF pH ON CORROSION OF 2024 AND 7075 ALLOYS BY WATER BOTTOM

Run No.	Weight Loss (mg/3.8 cm ²)		Incubation	Initial	
Run No.	Alloy 2024 Alloy 7075		Time (days)	pH*	
62 66 67 68 69	2.28 1.91 1.66 2.81 1.96	4.88 3.92 4.31 6.36 5.36	30 30 30 30 30	4.9 4.9 4.9 4.9	
72 73 74	3.93 ** 4.01	4.40 3.75 5.14	30 30 30	7.0 7.0 7.0	
61 63 64 65 70	19.59 15.53 19.26 16.72 16.86	22.88 16.95 20.29 20.92 16.36	90 90 90 90 90	4.9 4.9 4.9 4.9	
71 75	10.82 8.36	12.80 10.01	90 90	7.0 7.0	

^{*} Dilute KOH used for adjustment of pH.


^{**} Flask broken during incubation.

TABLE 2

CORROSIVITY OF FRACTIONS FROM 90-DAY CULTURE OF 101*

	Milli-	Weight Loss (mg/3.8 cm ²)				
	liters	Alloy 7075	Alloy 2024			
Original Culture	·	0.4	0.5			
Concentrate		62.9	33•9			
Sterile Medium Concentrate Control		0.1	0.1			
Dowex-1-Distilled Water		3.5	0.2			
Dowex-1-Sterile Medium Conc.		3.4	2.9			
Dowex-1-Concentrate		61.3	5•7			
Dowex-50-Distilled Water		0.1	0.1			
Dowex-50-Sterile Medium Conc.	~~	2.5	2.2			
Dowex-50-Concentrate		35•7	17.6			
Dowex-1-Concentrate-Dowex-50		0.1	0.1			
Sephadex Fractions						
Void Volume	148	0.6	0.5			
Light Brown	214	0•11	0.3			
Yellow	38	0.5	0.1			
Pale Amber	6	0.8	0.352			
Br own	5	0	0			
Deep Brown	3	0.1	0.4			
Purple	5	0.3	0•1			
Yellow-Pink	4	0.3	0.3			
Yellow	13	1.5	0.3			
Water	10	0•14	0•ft			

x Incubation was for 8 days at room temperature under stationary conditions.

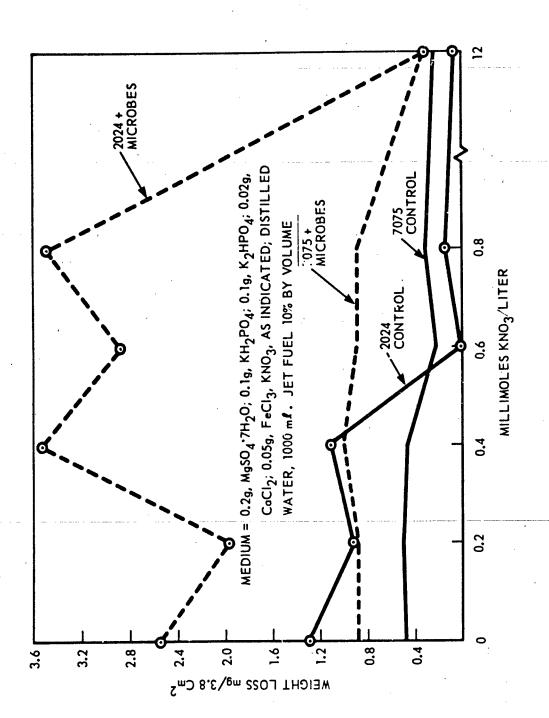

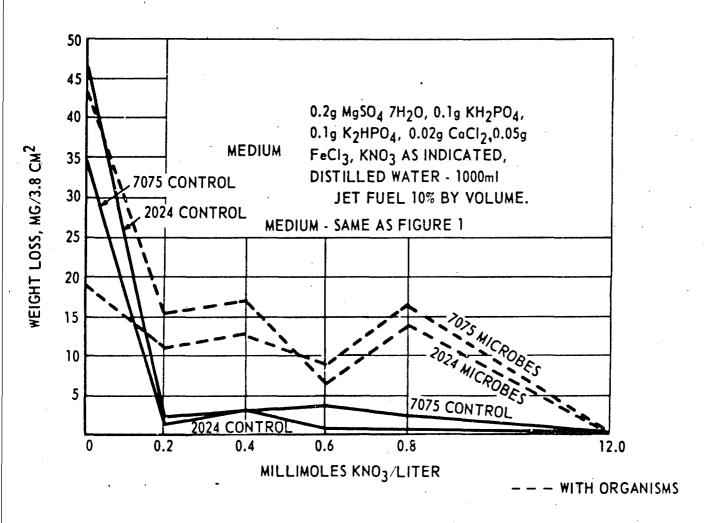
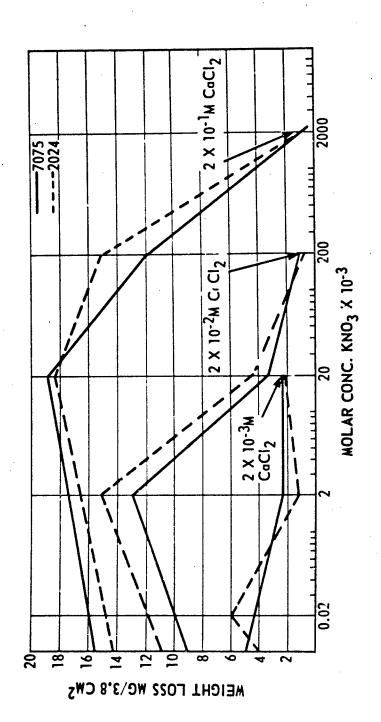


Figure 2. Effect of Nitrate in Microbial Corrosion (90-day Incubation)



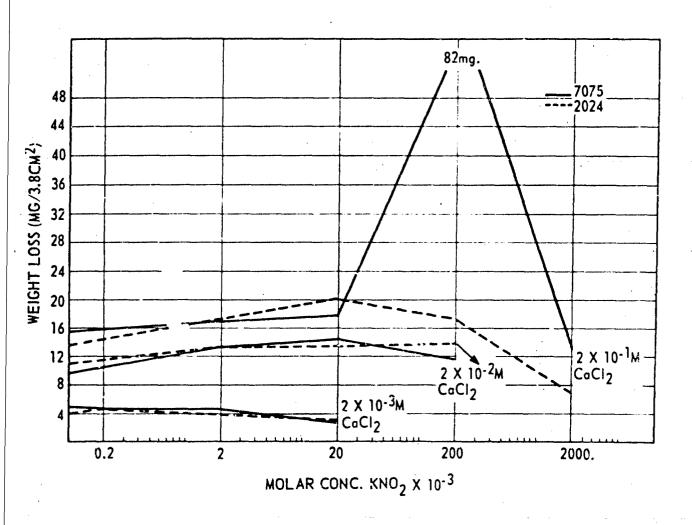


Figure 4. Effect of Nitrite on CaCl₂ Corrosion

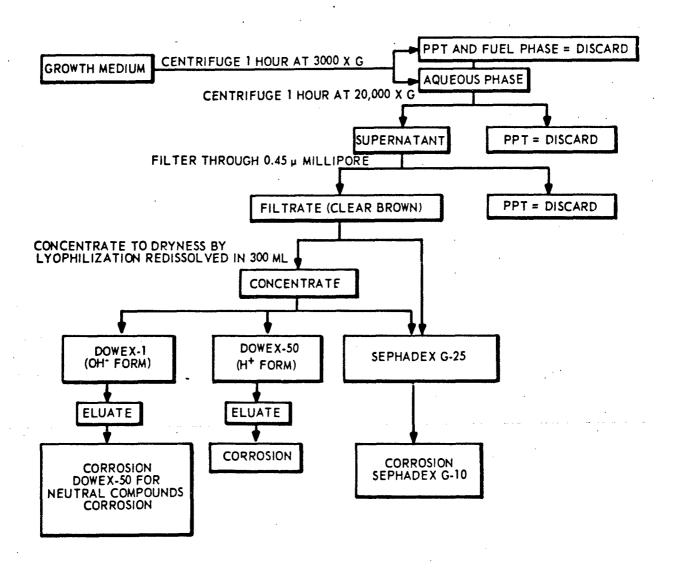


Figure 5. Extraction, Concentration, and Fractionation Scheme

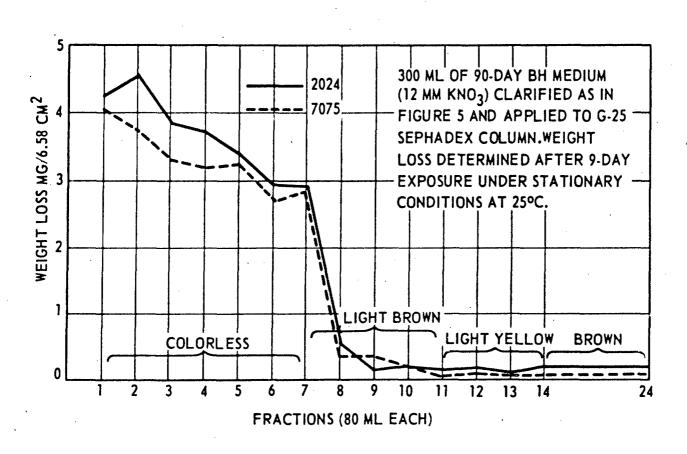


Figure 6. Corrosion by Sephadex Fractions

Security Classification

DOCUMENT CO (Security classification of title, body of abstract and index)	NTROL DATA - RA		the everall report is classified)				
1. ORIGINATING ACTIVITY (Corporate author) Melpar, Inc.			24. REPORT SECURITY C LASSIFICATION				
			Unclassified				
7700 Arlington Boulevard	!	25 GROU	P .				
Falls Church, Virginia 22046							
3 REPORT TITLE							
ALUMINUM CORROSION PROCESSES IN MICR	OBIAL CULTURES						
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)	aper presented	at the	Electrochemical Socie	eti			
Meeting, Buffalo, N.Y., Cct. 10-14, 1	965. To be pub	lished	in Journal Electro-				
S. AUTHOR(5) (Lest name, first name, initial) Chemical	Society, 1966.						
The street Courter Courter Char	 		•	I			
Blanchard, Gordon C. and Goucher, Cha	rles K.			I			
6. REPORT DATE	74. TOTAL NO. OF PA	AGEO	75. NO. OF REPS				
October 14, 1965	23		30				
Se. CONTRACT OR GRANT NO.	Se. ORIGINATOR'S RE	PORT NUM	BER(S)				
AF 33(657)-9186	PRC 65-84						
& PROJECT NO.							
3048			·				
d.	Sh. OTHER REPORT &	10(8) (Any	other numbers that may be easigned				
Task No. 304801	3.00			.			
d.	<u> </u>	-		_			
10. AVAILABILITY/LIMITATION NOTICES	ů.						
·							
	12. SPONSORING MILIT			\dashv			
11. SUPPLEMENTARY NOTES	IS SPORSONING MILIT	ANT ACTIV	♥!! ₹				
				ł			
√ ,			•				
13. ABSTRACT				-			

This paper presents data to support the concept that microorganisms can produce corrosion of 2024 and 7075 aluminum allcys by two mechanisms: (1) removal of a corrosion inhibitor, nitrate, from the growth medium and (2) production of metabolic products in the medium.

Results are presented to show that nitrate is a good inhibitor of CaCl corrosion of aluminum alloys and that nitrite, one of the metabolic products formed from nitrate by the microorganisms, is not an inhibitor of CaCl, corrosion of aluminum alloys.

DD .5084. 1473

UNCLASSIFIED

Security Classification

4 /	. KEY WORDS		1	LINKA		LINK B		LINK	
<i>i</i>			ROL		WT	ROLE	₩Ť	ROLE	
Jet fuel of Corrosion Nitrate Nitrite	alloy corrosion contamination mechanisms								
				.				-	

INSTRUCTIONS

- 1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
- 3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
- 4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
- 5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter test name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
- REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.
- 8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & \$d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9s. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. OTHER REPORT NUMBER(\$): If the report has been assigned any other report numbers (either by the originator or by the aponsor), also enter this number(s).
- 10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard stateme such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DD users shall request through
- (4) **U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through

If the report has been furnished to the Office of Techni Services, Department of Commerce, for sale to the public, cate this fact and enter the price, if known.

- 11. SUPPLEMENTARY NOTES: Use for additional expla-
- 12. SPONSORING MILITARY ACTIVITY: Enter the name the departmental project office or laboratory sponsoring (ping for) the research and development. Include address.
- 13. ABSTRACT: Enter an abstract giving a brief and fact dummary of the document indicative of the report, even though any also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet be attached.

It is highly desirable that the abstract of classified rebe unclassified. Each paragraph of the abstract shall end an indication of the military security classification of the formation in the paragraph, represented as (TS), (S), (C), or

There is no limitation on the length of the abstract. Hever, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful to or short phrases that characterize a report and may be used index entries for cataloging the report. Key words must be selected so that no security classification is required. Ide fiers, such as equipment model designation, trade name, mi project code name, geographic location, may be used as ke words but will be followed by an indication of technical context. The assignment of links, rules, and weights is option